


Instruction of motor exchange for 997 Head Lamp




1. Please take off the factory motor from the OE light.

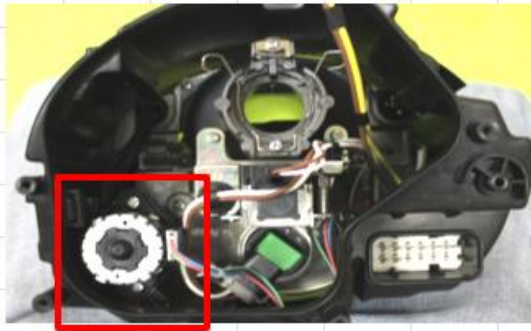


2. Please take off the cover from the headlight and remove the fake motor (shown as picture)

Before install the factory motor into Head Lamp unit, please do the following steps:

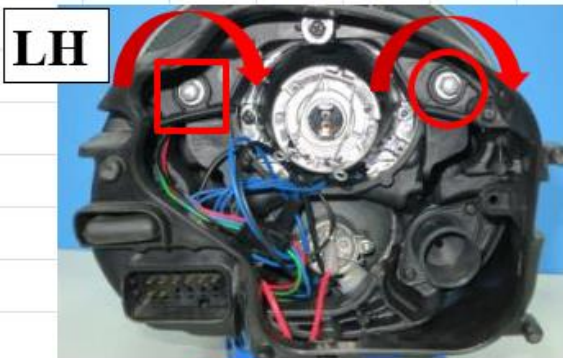


3.1 Turn the screw () 2 rounds by clockwise.

Turn the screw () 1 round by clockwise.



3.2 Turn the screw () 2 rounds by clockwise.

Turn the screw () 1 round by clockwise.



4. After finishing the steps as above, you could install the factory motor into headlight unit, then connect the connector of motor. Accomplished by installing the cover back to Light's unit.